

### Features:

- RF Frequency: 2 - 20 GHz
- Insertion Loss: 1.1 dB
- Common Port Return Loss: 12.5 dB
- ON Port Return Loss: 12 dB
- Isolation: 53.9 dB
- Output P1dB: 28.2 dBm
- DC supply current: 3 mA
- 0.1um GaAs pHEMT Technology
- Die Size: 1.15mm \* 1.45mm


### Applications:

- Antenna switching (Tx/Rx)
- RF signal routing
- Backup / redundancy switching
- Frequency band selection
- Test and measurement routing

### Deliverables:

- Sample Ready Die
- Product Datasheet

### Functional Block Diagram:

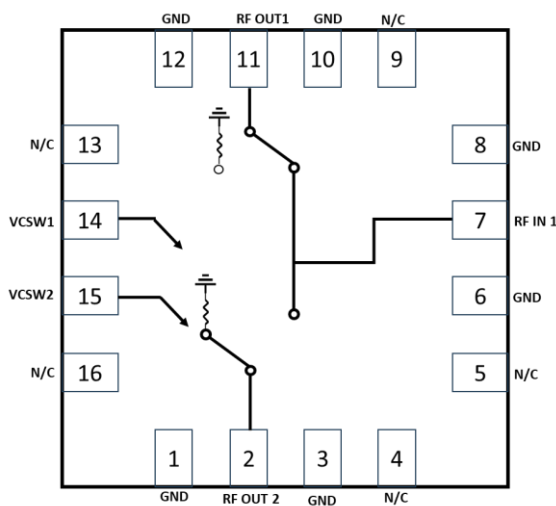

### Pin Configuration:

Pin No.	Pin Name	Description
6,15,2,4	GND	Ground
3	RF_IN1	RF_Input
14	RF_OUT1	RF_Output1
7	RF_OUT2	RF_Output2
1,5,8,9,12,13,16	N/C	Not Connected
11	VCSW1	Control Voltage Switch1
10	VCSW2	Control Voltage Switch2

### Description:

RFSWHP20 is an SPDT (Single Pole Double Throw) switch designed to operate over a wide frequency range of 2 GHz to 20 GHz. The switch is optimized for high-power signal routing applications and delivers a typical insertion loss of 1.1 dB across the operating band.

All RF ports are internally matched to 50 ohms, and integrated on-chip DC blocking capacitors are provided at the input and output to ensure reliable bias isolation and simplified external matching.





The Technology used to design the SPDT Switch is a 0.1um GaAs pHEMT Process.

### Electrical Specification:




Freq= 2 - 20 GHz, ID= 3 mA, Zo=50 Ω

Parameters	Test Condition	Units	Typ.
Insertion Loss	2 GHz	dB	1.8
	10 GHz		1.1
	20 GHz		1.5
Common Port Return Loss	2 GHz	dB	6.15
	10 GHz		12.5
	20 GHz		14.15
ON Port Return Loss	2 GHz	dB	6.2
	10 GHz		12
	20 GHz		20.6
IP1dB	2 GHz	dB	24.7
	10 GHz		28.2
	20 GHz		26.5
Isolation	2 GHz	dB	51.3
	10 GHz		53.9
	20 GHz		32.7
<b>Operating Bias Conditions</b>			
Drain Current (Id)	-	mA	3
ON Control Voltage (VCSW)	-	V	5
OFF Control Voltage (VCSW)	-	V	-2.5

### Wafer Level Measured Results (ON State):

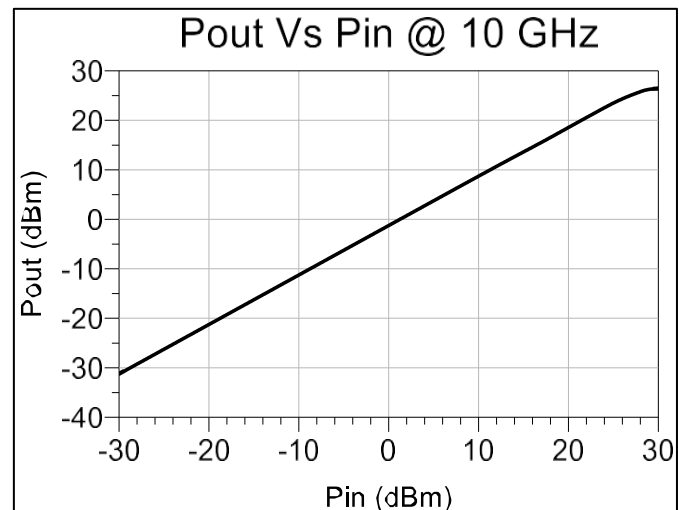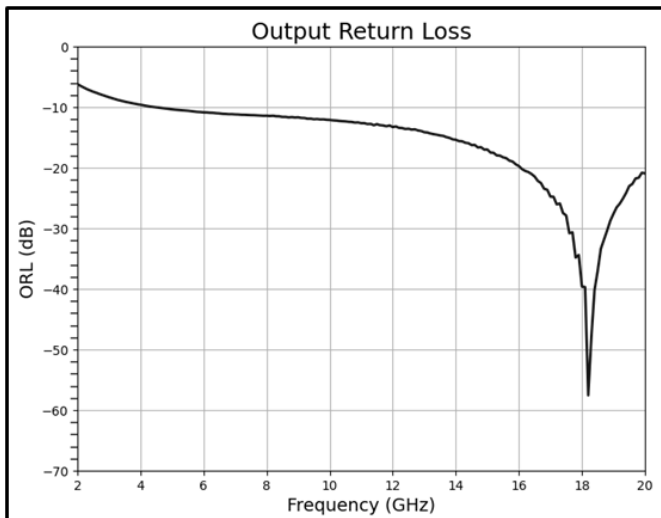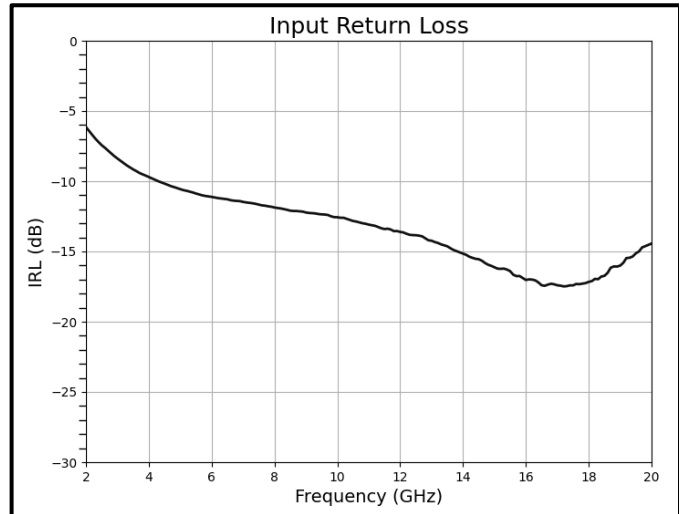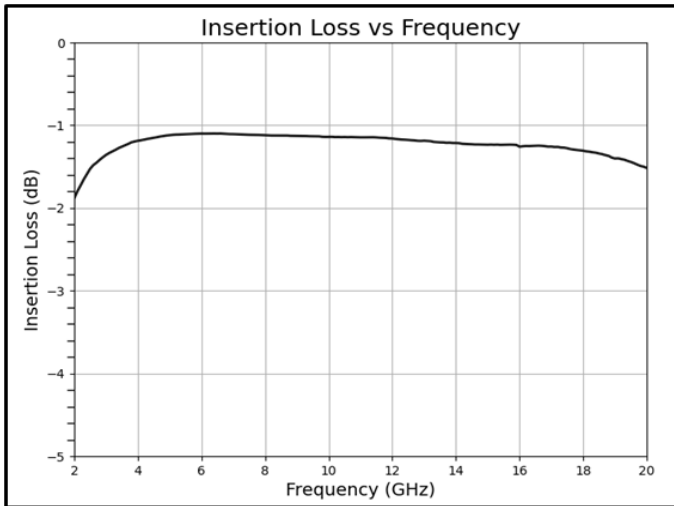

### Wafer Level Measured Result (OFF State):

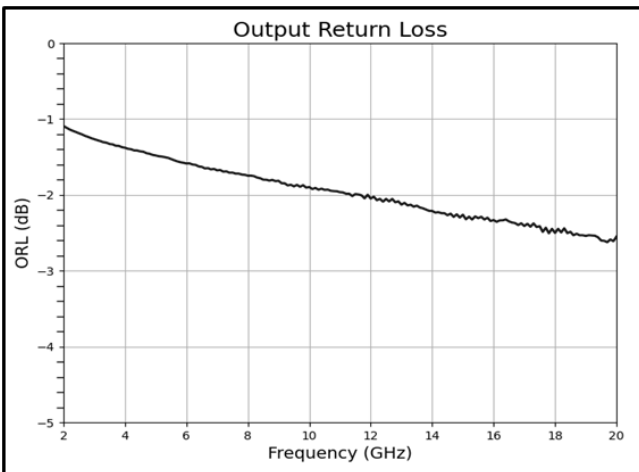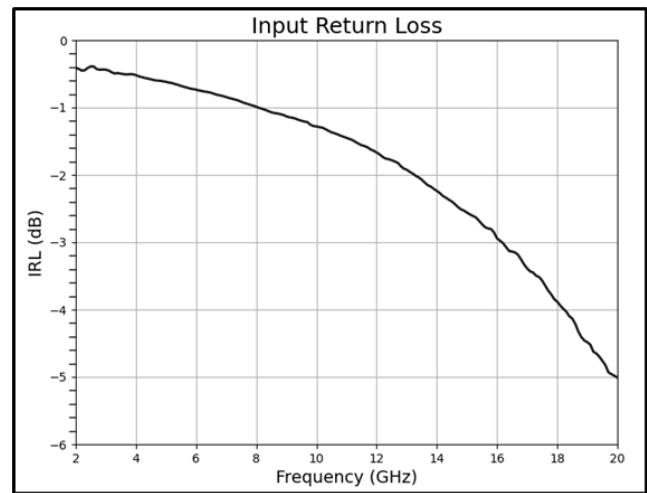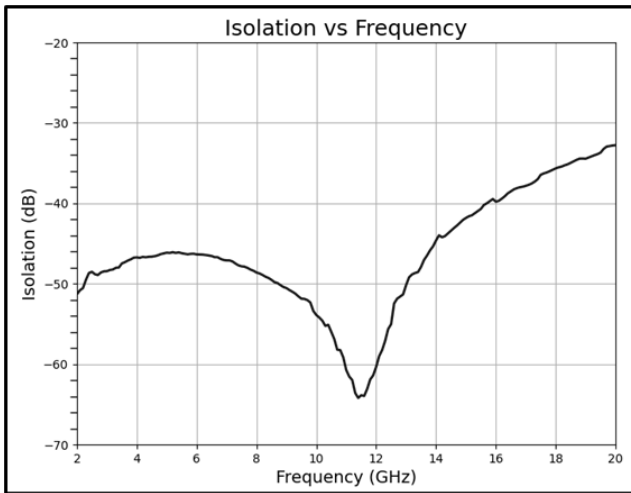


# SPDT Switch



## PRODUCT DATASHEET

## RFSWHP20

### Application Diagram:

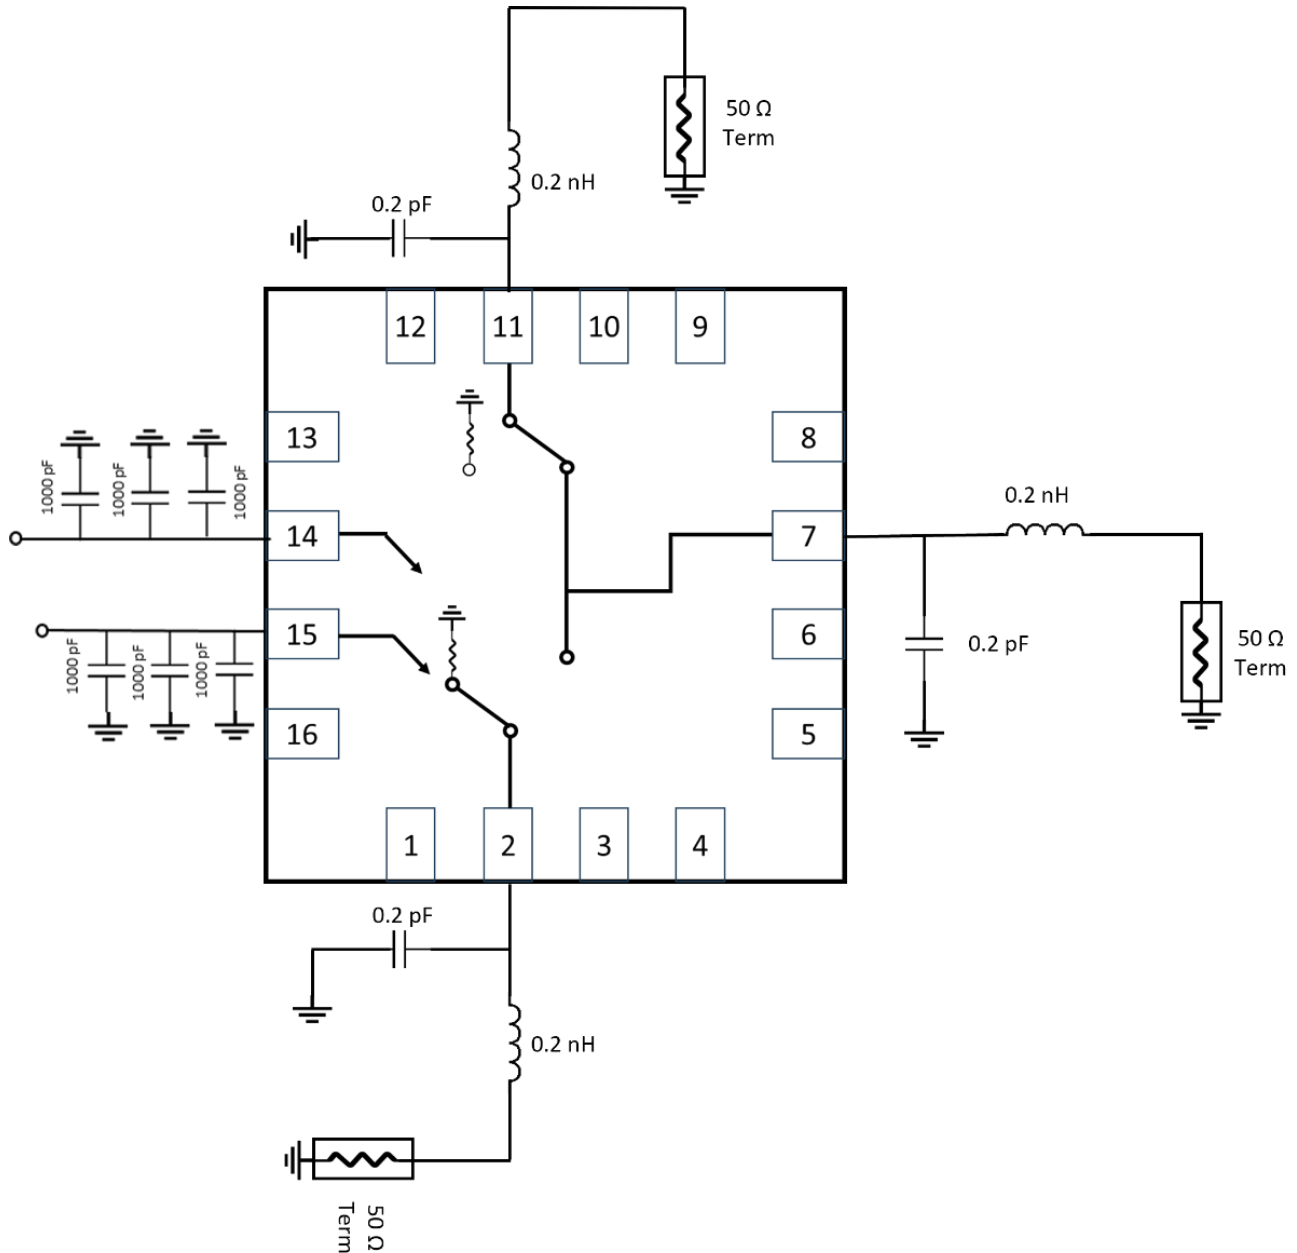

Signify RF confidential property is not to be copied or disclosed without prior authorization.

[www.signifyrf.com](http://www.signifyrf.com)

June 2026

### Disclaimer:

Information in this document is provided in connection with Signify RF products. These materials are provided by Signify RF as a service to its customers and may be used for informational purposes only. Except as provided in Signify RF Terms and Conditions of Sale for such products or in any separate agreement related to this document, Signify RF assumes no liability whatsoever. Signify RF assumes no responsibility for errors or omissions in these materials. Signify RF may make changes to specifications and product descriptions at any time, without notice. Signify RF makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

### Contact information:

For the latest specifications, additional product information:

Web: [www.signifyrf.co.in](http://www.signifyrf.co.in)

Email: [sales@signifyrf.com](mailto:sales@signifyrf.com)

Tel: (+1) 840 356 8957, (+91) 90220 78131, (+91) 84858 41789